

**LifeSize Passport revolutionizes  
face-to-face communications.  
Now Plugged into Skype™.**



## Telepresence in the Palm of Your Hand

LifeSize Passport shattered the boundaries of video collaboration when we first introduced it in 2009 with its accessible price point and compact form factor, making it ideal to fit into any work environment. Today, it continues to lead the industry in price/performance, with its telepresence-quality capabilities at less than half the price of other systems in its class.

### Transforming Video Communications

With LifeSize Passport you get True HD video quality—720p30—for natural, realistic interactions at only 1 Mbps over any internet connection. Easily share data in the form of presentations or content over the network. Users can record video with one button recording and live streaming via LifeSize® Video Center.

And now that Passport is plugged into Skype, your universe just got bigger. Individual offices, teleworkers and small to medium-sized businesses can stay connected easily with anyone using Skype around the world. LifeSize Passport is the first room-based, business-class HD video conferencing solution to be Plugged into Skype, which means it has been qualified by Skype to work with the Skype platform. People on Skype worldwide will now be accessible from the LifeSize Passport directory, letting you connect to them with just one click. Collaborate via high quality, reliable video from any LifeSize Passport to any Skype-enabled PC and connect over audio to any mobile devices running Skype.

In today's fast-moving, global economy, the telephone and e-mail are not enough. Frequent face-to-face meetings and meaningful dialog are vital for success, but travel is expensive and time consuming. LifeSize Passport helps maximize productivity and eliminate wasted travel time. The return on your investment is clear.

**Powerful. Easy. Affordable. LifeSize Passport is clearly how video communication is meant to be.**

## LifeSize Passport Key Features


Video  
Quality

HD Quality  
1280x720 - 30fps  
16:9 format


HD Monitor



HD Camera



HD Audio



External  
Audio & Video  
Input/Output

Audio: 2 in, 2 out  
Video: 1 in, 1 out

Point-to-Point  
HD Video  
Communications



Data Transmit

Share presentations  
during a video call via  
LifeSize® Virtual Link™

Live Streaming and  
Recording

One button recording  
and live streaming to  
LifeSize® Video Center

Plugged into Skype™

Connect over video to  
any Skype-enabled PC

# Product Specifications

# LifeSize® Passport™

## System Components

LifeSize codec  
High Definition LifeSize Camera 200 or LifeSize Focus  
LifeSize MicPod or LifeSize Focus  
Wireless remote control  
Power supply/cables

## System Configurations

LifeSize codec, LifeSize Camera 200, LifeSize MicPod  
LifeSize codec, LifeSize Focus

## Communications

H.323, SIP, Skype™  
128 Kbps–2.0 Mbps  
1xRJ-45 network LAN  
1x3.5 mm Mic In for LifeSize MicPod  
H.323 including AES, SIP (data transmit):128 Kbps – 1 Mbps

## Support for Single HD Display

Any HD display supporting HDMI input  
For additional information on displays, visit:  
[www.lifesize.com/support](http://www.lifesize.com/support)

## HD 720p Camera

Support for single camera

### LifeSize Camera 200

Wide-angle lens with 70 degree field of view  
4x optical zoom  
Auto focus/Automatic gain control  
10 camera presets (near or far end)  
7.5 m/25 ft. cable, optional 15 m/50 ft. cable

### LifeSize Focus

Wide-angle lens with 70 degree field of view  
Fixed focus with range from 241MM (9.5") to infinity  
2.9 m/10 ft. cable, optional 7.5 m/25 ft. and 15 m/50 ft. cables

## Video Specifications/Video Resolutions

Maximum resolutions widescreen 16:9 aspect ratio  
All resolutions progressive scanning  
All resolutions at 30 frames per second  
192 Kbps (432x240 pixels) widescreen FCIF  
384 Kbps (720x400 pixels) cable TV  
512 Kbps (800x448 pixels) DVD resolution  
768 Kbps(1024x576 pixels) 2x DVD resolution  
1.1 Mbps or higher (1280x720 pixels) high definition  
Actual resolution depends on capability of remote end and is impacted by the quality of the communication channel

## Video Standards

H.264, H.263, H.261 and H.239/BFCP compliant with Polycom  
H.239 transmit-uses H.264 (requires software version 4.7 or newer and LifeSize® Virtual Link™)

## Video Input (1 Input)

1 x HD Camera (720p30)

## Video Output (1 Output)

1 x HD Video Out (720p30)

## HD Audio

### Single or dual omni-directional LifeSize MicPod

100 Hz up to 16 kHz  
Mute button  
Powered by codec directly through cable

### High Quality Active Microphones with LifeSize Focus HD Camera

Dual omni-directional, beam-forming microphones  
100 Hz up to 16 kHz  
Powered by codec directly through cable

## Audio Features

Three-way audio add-on capability  
Built-in ringer  
GIPS NetEQ packet loss concealment  
Full duplex for natural conversations  
Echo cancellation for echo-free calls  
Automatic noise reduction  
Automatic gain control  
MicPod or Dual MicPod support (optional)  
Place and receive audio calls through Skype™

## Audio Standards

G.711, G.722, G.722.1 and G.722.1C licensed from Polycom®, G.728, G.729, MPEG-4-AAC-LC, SILK

## Audio Inputs (2 Inputs)

1 x Mic In - Two channel (3.5mm)  
1 x HD Camera In (Focus)

## Audio Outputs (2 Outputs)

1 x Line Out/Headset (L+R)  
1 x HD Video Out

## Other Supported Standards

H.225, H.245, H.281, RFC 3261, RFC 3264, RFC 2190, RFC 3407, RFC 2833

## User Interface & Features

Context sensitive user interface  
Graphical user interface call manager  
Multiple languages supported  
Do Not Disturb mode

## Stream/Record with LifeSize® Video Center

Stream/record video and data\* outside of a call  
Single button, ad-hoc recording  
Recording indicator  
Available with software version 4.7 or newer

## Security

Admin and user level password  
SNMP security alerts  
Ability to disable HTTP, SSH and Telnet services  
H.235 (AES) encryption support including strict compliance  
TLS/SRTP support  
IEEE 802.1x support  
Kensington Security Slot™

## Intelligent Network Features

Adaptive Motion Control (AMC) including Forward Error Correction (FEC)  
NAT/firewall traversal (H.460/SIP)  
IPv4 and IPv6 support  
Auto bandwidth detection

## Directory and Address Book

Up to 1000 local directory entries  
Save, lock, remove, redial list features  
Missed call notification  
Auto-discovery directory lookup (patent pending)  
LDAP support/H.350 compliant  
Skype™ contacts support  
H.323 URI dialing support (Annex O)

## System Management

SNMP  
Backup and restore capability

## Power

AC Voltage 100–240V, 50–60 Hz, 1.0A via external power supply  
Typical power consumption: 75.4 watts  
Maximum power consumption: 91.5 watts  
Maximum calorific power: 312 BTU/H

## Environmental Data

Operating temperature: 0° C (32° F) to 40° C (104° F)  
Operating humidity: 15% to 85%, non-condensing  
Storage temperature: -20° C (-4° F) to 60° C (140° F)  
Storage humidity: 10% to 90%, non-condensing

## Codec Dimensions

Width: 206 mm (8.1")  
Depth: 121 mm (4.7")  
Height: 33 mm (1.3")  
Weight: 0.45 Kg (1.0 lbs)

## Regulatory Model Number

LifeSize Passport = LFZ-014


## Regulatory Certifications

FCC Class A: LifeSize Passport - LifeSize Camera  
FCC Class B: LifeSize Passport - LifeSize Focus



Microsoft® qualified with Microsoft® Office Communications Server 2007 R2™ and interoperable with Microsoft Lync™.

\* Recording data requires LifeSize® Virtual Link™

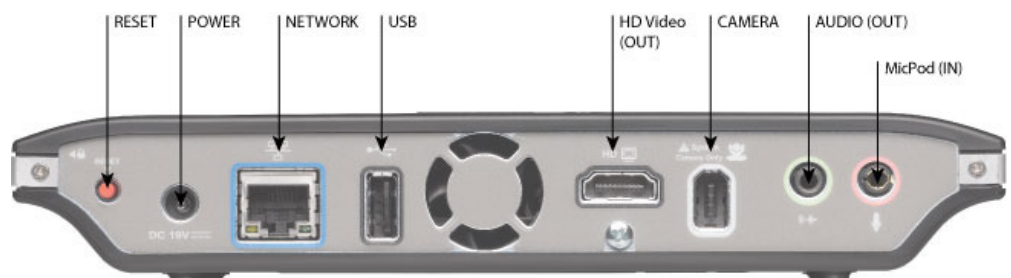

### AMERICAS:

LifeSize  
1601 S. MoPac Expressway  
Suite 100  
Austin, Texas 78746 USA

+1 512 347 9300  
Toll Free US +1 877 543 3749  
E-mail [info@lifesize.com](mailto:info@lifesize.com)  
[www.lifesize.com](http://www.lifesize.com)

### EMEA:

LifeSize Regional Office  
+49 89 1222 899 0 (Germany)  
Toll Free Europe 00 8000 999 09 799

### APAC:

LifeSize Regional Office  
+65 6303 8370 (Singapore)